


STRUCTURAL STEEL REFERENCE GUIDE: UNEQUAL ANGLES

| Designation | Weight | Surface Area | Side A b_1 | Side B b_2 | Thickness of Flange t_f |
|-------------|--------|-------------------|-----------------|-----------------|------------------------------|
| | kg/m | m ² /m | mm | mm | mm |
| 150x100x12 | 22.5 | 0.491 | 150 | 100 | 12.0 |
| 150x100x10 | 18.0 | 0.491 | 150 | 100 | 9.5 |
| 150x90x16 | 27.9 | 0.471 | 150 | 90 | 15.8 |
| 150x90x12 | 21.6 | 0.471 | 150 | 90 | 12.0 |
| 150x90x10 | 17.3 | 0.471 | 150 | 90 | 9.5 |
| 150x90x8 | 14.3 | 0.471 | 150 | 90 | 7.8 |
| 125x75x12 | 17.7 | 0.392 | 125 | 75 | 12.0 |
| 125x75x10 | 14.2 | 0.392 | 125 | 75 | 9.5 |
| 125x75x8 | 11.8 | 0.392 | 125 | 75 | 7.8 |
| 125x75x6 | 9.16 | 0.392 | 125 | 75 | 6.0 |



- Manufactured in accordance with the requirements of Australian Standard AS/NZS 3679.1 2016 in Grade 300.
- Grade 350 & 350L0 available on request.
- Non-standard lengths or cut to size on request.

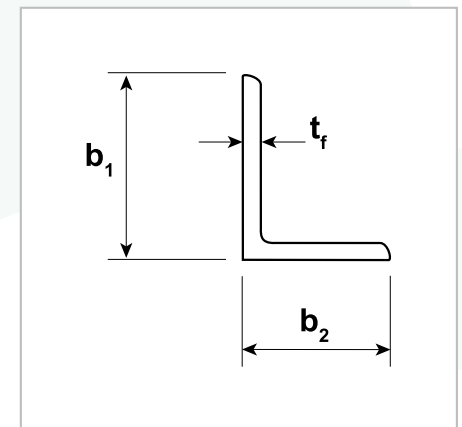